

# KILNS FOUR DEPARTURE (RNAV)


SE-2, 31 JAN 2019 to 28 FEB 2019

- D-ATIS DEP 132.1
- CLNC DEL 127.15 348.6
- CPDLC
- GND CON
- 121.8 348.6 (180°-359°)
- 121.9 348.6 (360°-179°)
- CHARLOTTE TOWER
- 118.1 257.8 (Rwys 5-23, 18L-36R)
- 126.4 257.8 (Rwy 18C-36C)
- 133.35 257.8 (Rwy 18R-36L)
- CHARLOTTE DEP CON
- 124.0 307.8


### TAKEOFF MINIMUMS

Rwys 18C/L/R, 23, 36C/R: Standard with minimum climb of 500' per NM to 1260.  
 Rwy 5: Standard with minimum climb of 500' per NM to 1300.  
 Rwy 36L: Standard with minimum climb of 500' per NM to 1400.

TOP ALTITUDE:  
8000

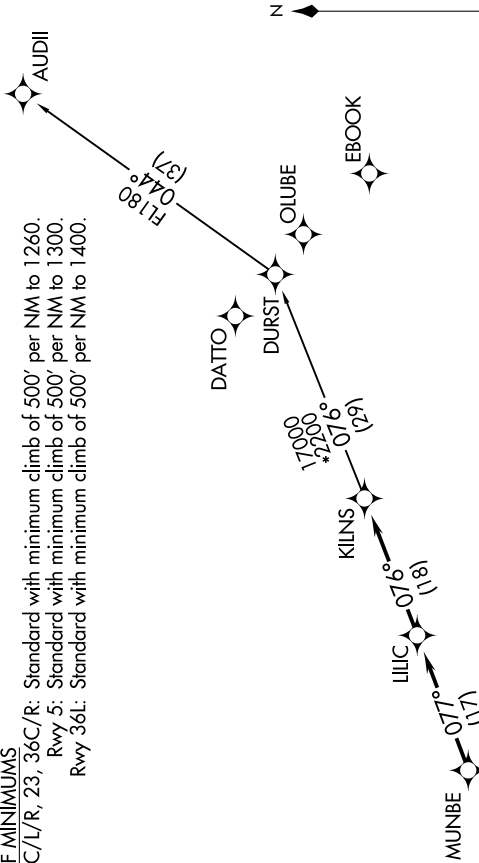

- NOTE: For turbojets only.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: RNAV 1.
- NOTE: RADAR required.
- NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.
- NOTE: Accelerate to 250K, if unable advise ATC. Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.

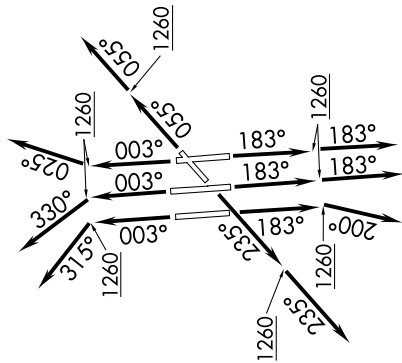

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

# KILNS FOUR DEPARTURE (RNAV)

SE-2, 31 JAN 2019 to 28 FEB 2019