

WAAS CH 70300 W05A	APP CRS 055°	Rwy Idg TDZE 716 Apt Elev 748	7092
--	------------------------	---	-------------

RNAV (GPS) Y RWY 5



CHARLOTTE/DOUGLAS INTL (CLT)

▼ Circling NA at night. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cat C/D visibility to 1¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. ** RVR 1800 authorized with use of FD or AP or HUD to DA.




MISSED APPROACH: Climb to 4000 direct ATELL and hold, continue climb-in-hold to 4000.

D-ATIS ARR 121.15 DEP 132.1	CHARLOTTE APP CON (001°-119°) 128.32 (120°-245°) 120.05 (246°-360°) 134.75 (180°-359°) 257.2 (360°-179°) 307.8	CHARLOTTE TOWER (Rwys 18L-36R, 5-23) 118.1 257.8 (Rwy 18C-36C) 126.4 257.8 (Rwy 18R-36L) 133.35 257.8	GND CON (180°-359°) 121.8 348.6 (360°-179°) 121.9 348.6	CLNC DEL 127.15 348.6
---	--	---	---	---

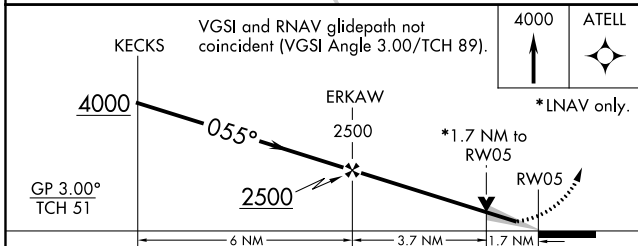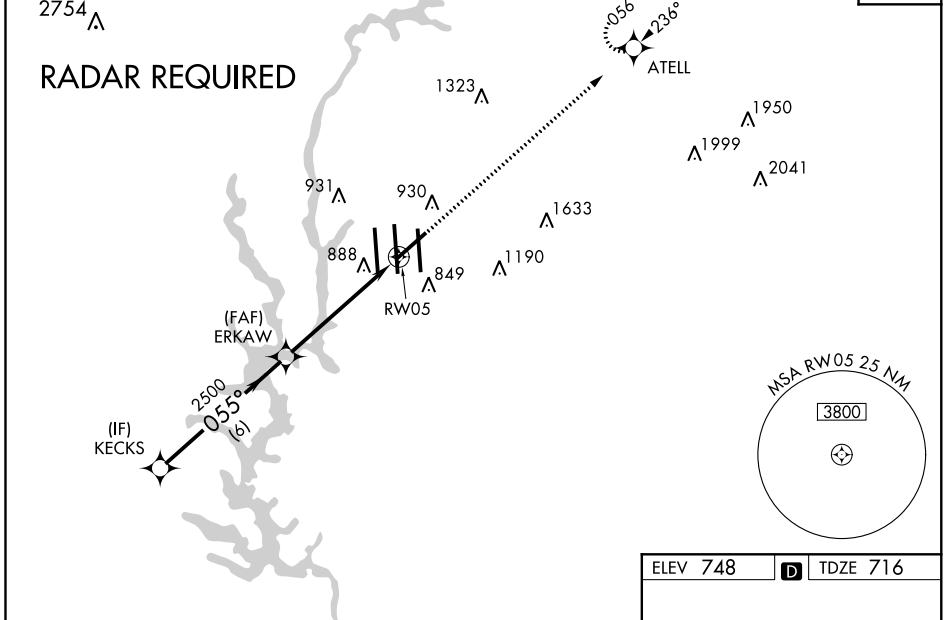

CATEGORY	A	B	C	D
LPV DA **		916/24	200 (200-½)	
LNAV/VNAV DA		1229/55	513 (600-1)	
LNAV MDA	1320/24	604 (700-½)	1320/55	604 (700-1)
C CIRCLING	1380-1	632 (700-1)	1500-2¼ 752 (800-2¼)	1500-2½ 752 (800-2½)

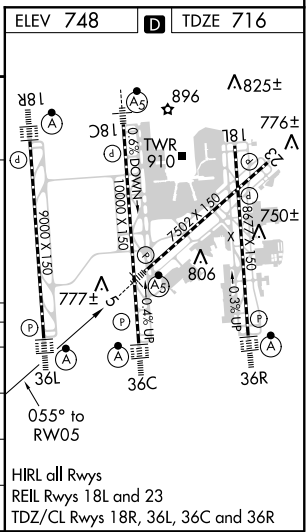

SE-2, 31 JAN 2019 to 28 FEB 2019

SE-2, 31 JAN 2019 to 28 FEB 2019