BALTIMORE/ RNAV (GPS) Y RWY 28
WASHINGTON INTL THURGOOD MARSHALL (BWI)

WAAS	APP CRS		
CH 48808	285°	Rwy Idg	9802
W28A		TDZE	143
		Apt Elev	143

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000. ** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2500 direct COLUM and hold.

D-ATIS	POTOMAC APP CON		BALTIMORE TOWER	GND CON	CLNC DEL
115.1 127.8	119.0 282.275 (020°-100°) 119.7 290.475 (131°-180°)		119.4 257.8	121.9	118.05
	124.55 317.425 (101°-130°) 128.7 307.9 (181°-019°)				

CPDLC

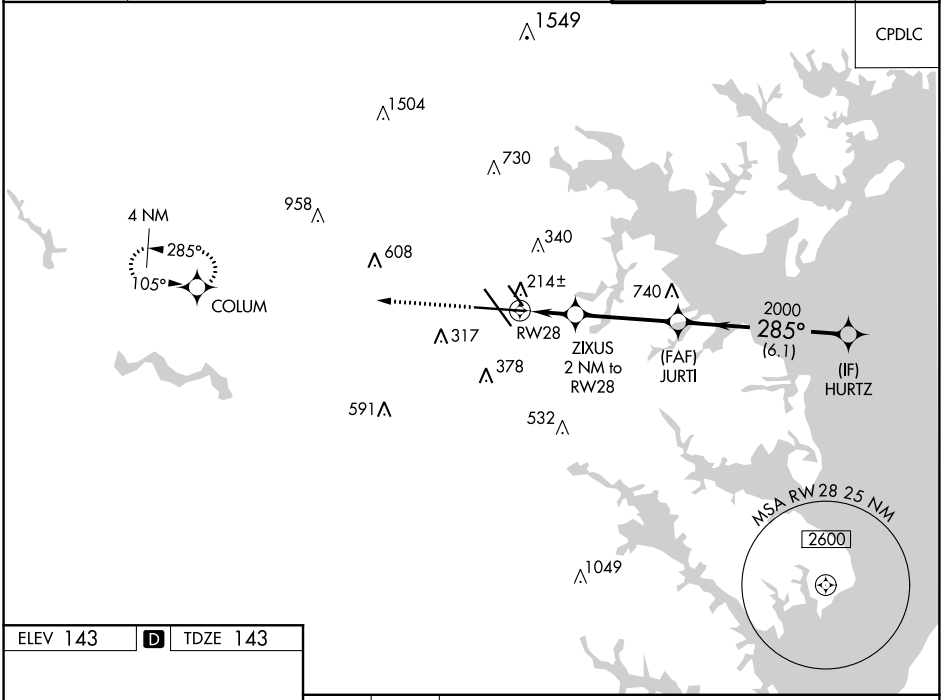

ELEV 143 | D | TDZE 143



TDZ/CL Rwys 10 and 33L
REIL Rwys 15L and 33R
HIRL all rwys

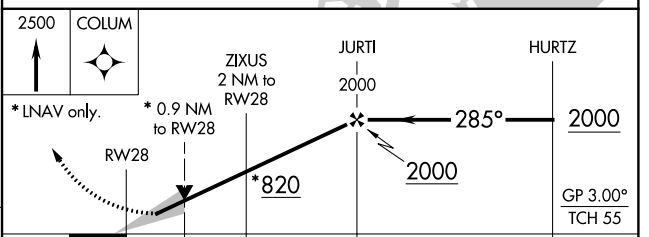

CATEGORY	A	B	C	D
LPV DA**	343/24 200 (200-½)			
LNAV/VNAV DA	395/24 252 (300-½)			
LNAV MDA	480/24 337 (400-½)		480/26 337 (400-½)	
C CIRCLING	640-1 497 (500-1)	660-1 517 (600-1)	700-1½ 557 (600-1½)	860-2¼ 717 (800-2¼)

NE-3, 31 JAN 2019 to 28 FEB 2019