
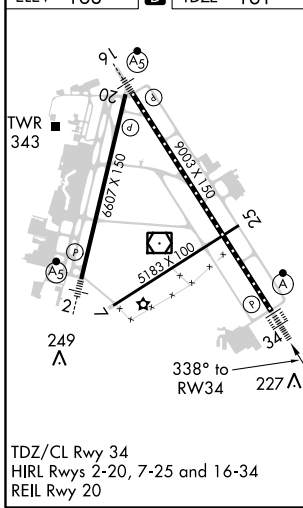


WAAS CH 97520 W34A	APP CRS 338°	Rwy Idg TDZE Apt Elev	9003 161 168
--	------------------------	-----------------------------	---

RNAV (GPS) Z RWY 34

RICHMOND INTL (RIC)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). For inop ALS, increase LNAV/VNAV all Cats visibility to 1¼ SM and LNAV Cats C and D visibility to RVR 5500.		ALSF-2 	MISSED APPROACH: Climb to 2500 direct IFPIG and hold.
ATIS 119.15 263.025	POTOMAC APP CON 126.4 282.375 (001°-185°) 126.75 307.2 (186°-360°)	RICHMOND TOWER 121.1 257.8	GND CON 121.9 348.6
		CLNC DEL 127.55 348.6	

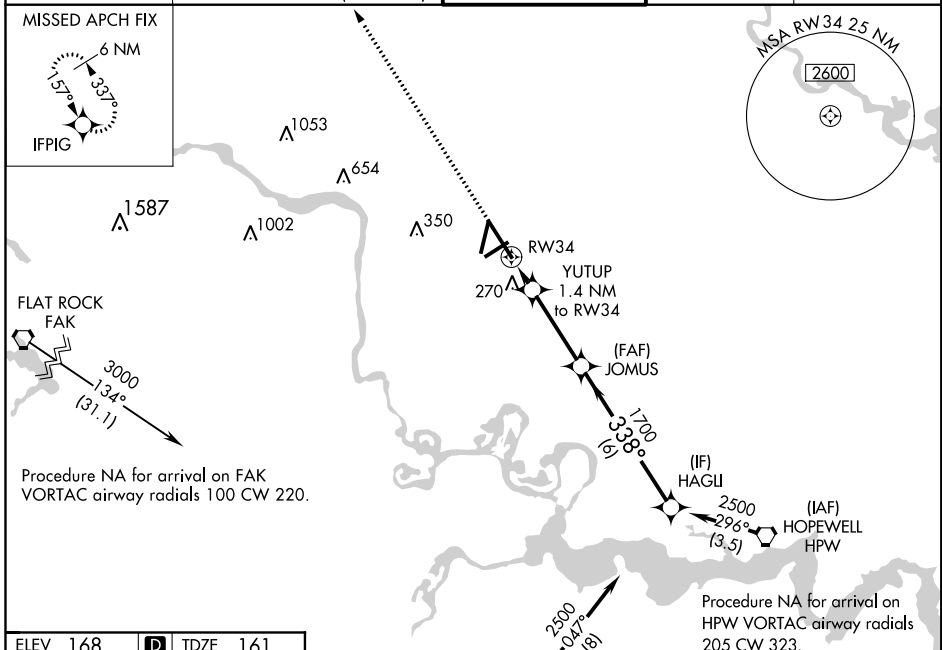

2500	IFPIG	HAGLI	2500
*LNAV only.		JOMUS	1700
YUTUP 1.4 NM to RW34		338°	
RW34		1700	
*660		GP 3.00°	
		TCH 54	
1.4 NM		3.3 NM	
		6 NM	
CATEGORY	A	B	C
LPV DA	361/18		200 (200-½)
LNAV/VNAV DA	530/37		369 (400-¾)
LNAV MDA	520/24	359 (400-½)	520/30 359 (400-¾)
CIRCLING	660-1	492 (500-1)	700-1½ 532 (600-1½) 720-2 552 (600-2)

NE-3, 28 FEB 2019 to 28 MAR 2019

NE-3, 28 FEB 2019 to 28 MAR 2019