RNAV (GPS) Y RWY 23R

RALEIGH-DURHAM INTL (RDU)

WAAS	APP CRS	Rwy Idg	10000
CH 45613	234°	TDZE	409
W23A		Apt Elev	435

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 3100 direct GUKEY and right turn on 297° track to CHAPL and hold.

D-ATIS	RALEIGH APP CON	RALEIGH TOWER (EAST)	RALEIGH TOWER (WEST)	GND CON (EAST)	GND CON (WEST)	CLNC DEL	CPDLC
123.8	127.675 307.9	127.45 257.8 Rwys 5R-23L and 14-32	119.3 257.8 Rwy 5L-23R	121.9 348.6 Rwys 5R-23L and 14-32	121.7 348.6 Rwy 5L-23R	120.1	

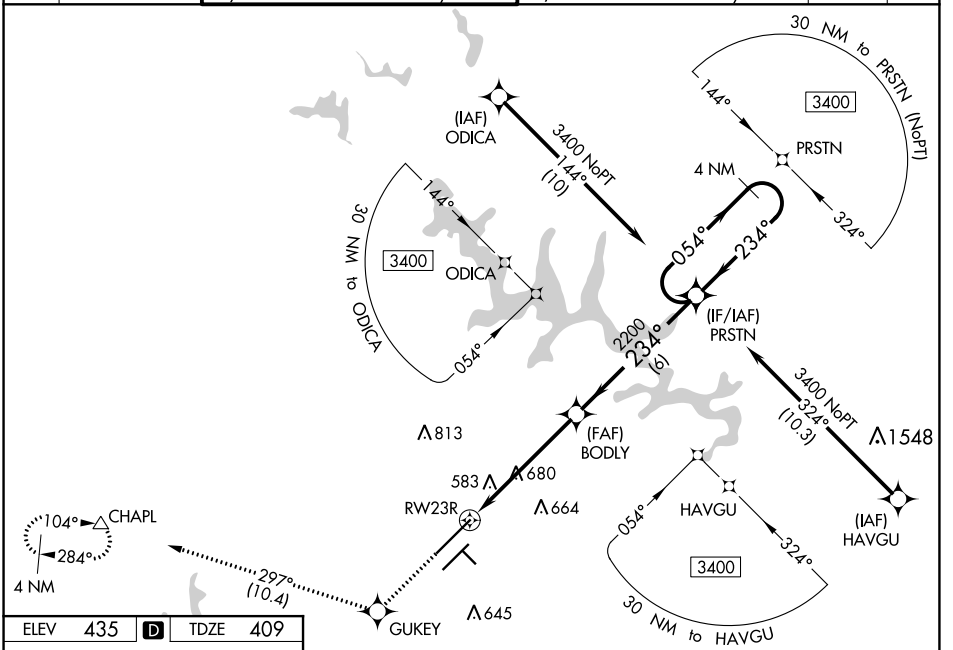

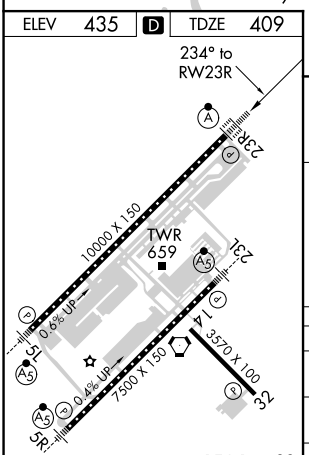

REIL Rwy 32
MIRL Rwy 14-32
HIRL Rwys 5L-23R and 5R-23L
TDZ/CL Rwys 5L, 23L, and 23R

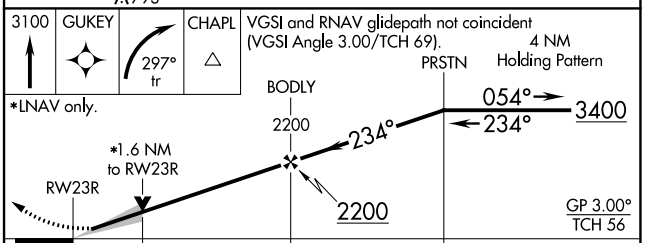

CATEGORY		A	B	C	D
LPV	DA	609/18 200 (200-½)			
LNAV/VNAV	DA	927/60 518 (500-1¼)			
LNAV	MDA	1000/24 591 (600-½)		1000/50 591 (600-1)	1000/60 591 (600-1¼)
C	CIRCLING	1000-1 565 (600-1)		1040-1¾ 605 (700-1¾)	1180-2½ 745 (800-2½)

SE-2, 10 SEP 2020 to 08 OCT 2020
SE-2, 10 SEP 2020 to 08 OCT 2020