RNAV (GPS) RWY 19R

WASHINGTON DULLES INTL (IAD)

WAAS	APP CRS		
CH 86709	191°	Rwy Idg	9400
W19D		TDZE	278
		Apt Elev	312

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP -0.3 NA. Simultaneous approach authorized with ILS or LOC Rwy 19L, ILS Rwy 19L (Cat II). LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 5000 direct HIMRA and on 280° track to OLIVR and hold, continue climb-in-hold to 5000.

D-ATIS	POTOMAC APP CON	DULLES TOWER	GND CON
134.85	120.45 306.925 (241°-330°) 128.525 306.925 (091°-240°) 126.1 338.25 (331°-090°)	120.1 317.8 (Rwy 1R/19L) 120.25 348.6 (Rwy 1C/19C) 134.425 348.6 (Rwy 1L/19R and 12/30)	121.9 317.8 (EAST) 121.625 348.6 (WEST)

CLNC DEL	CPDLC
135.7 317.8	

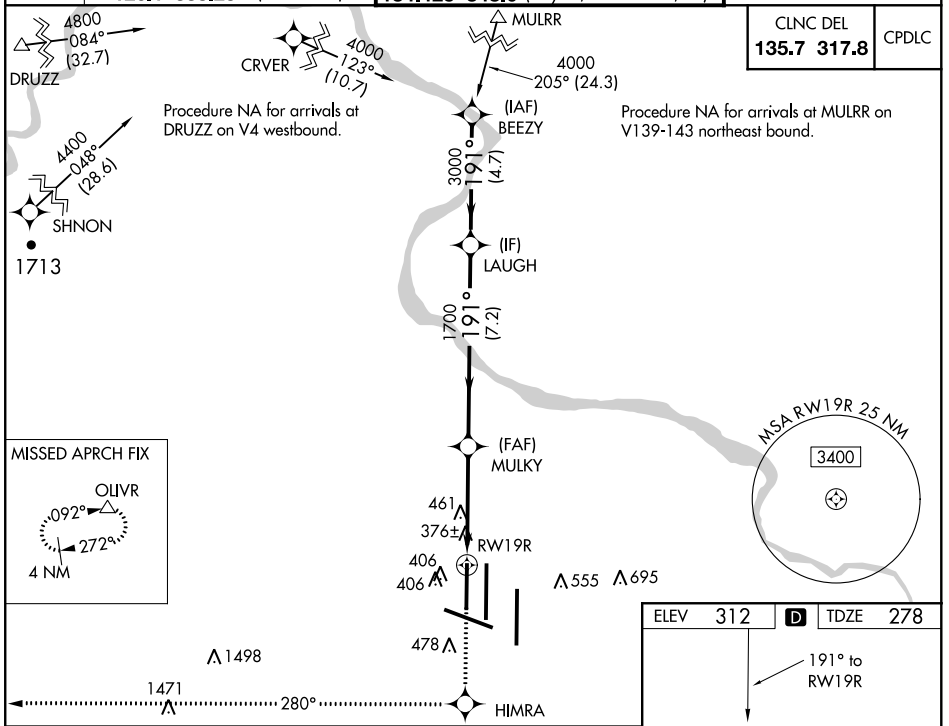

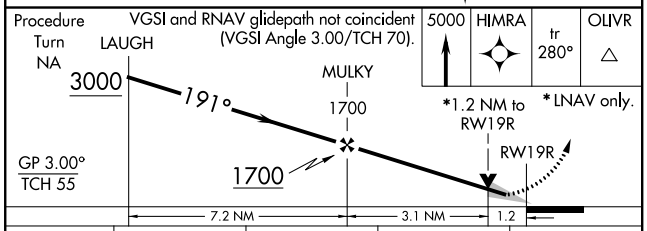

CATEGORY	A	B	C	D
LPV DA		478/18 200 (200-½)		
LNAV/VNAV DA		714/50 436 (500-1)		
LNAV MDA	720/24 442 (500-½)		720/40 442 (500-¾)	720/50 442 (500-1)
CIRCLING	940-1 628 (700-1)		940-1¾ 628 (700-1¾)	940-2 628 (700-2)

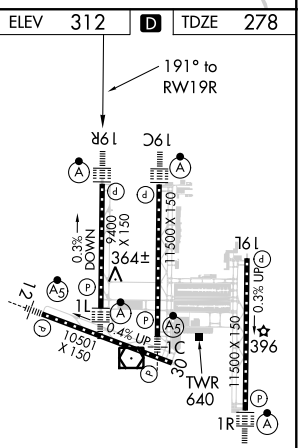

TDZ/CL Rwys 1C, 1L, 1R, 12, 19C and 19R
REIL Rwy 30
HIRL all Rwys

NE-3, 08 OCT 2020 to 05 NOV 2020
NE-3, 08 OCT 2020 to 05 NOV 2020