

LOC/DME I-PXY 111.5 Chan 52	APP CRS 256°	Rwy ldg 7867 TDZE 683 Apt Elev 729
---	------------------------	---



LOC RWY 25L

GENERAL MITCHELL INTL (MKE)



RADAR required for procedure entry. DME or RADAR required.
 ▼ Rwy 25L helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH: Climb to 2800 then right turn direct BAE VOR/DME and hold.

D-ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 124.575 269.05	GND CON 121.8 263.125	CLNC DEL 120.8	CPDLC
------------------------	---	--	---------------------------------	--------------------------	-------

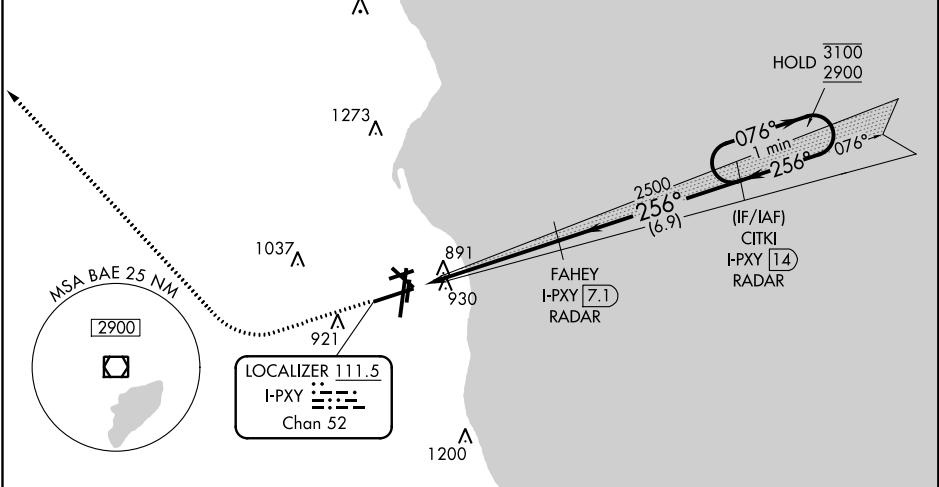

ELEV 729	D	TDZE 683
-----------------	----------	-----------------

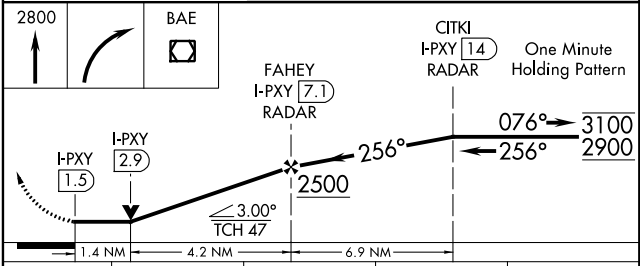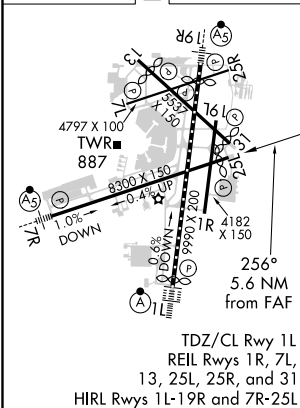

	FAF to MAP 5.6 NM					
	Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52	

CATEGORY	A	B	C	D
S-LOC 25L	1160-1	477 (500-1)	1160-1 3/8	477 (500-1 3/8)
<input checked="" type="checkbox"/> CIRCLING	1240-1	511 (600-1)	1240-1 1/2	1360-2
			511 (600-1 1/2)	631 (700-2)

EC-3, 31 DEC 2020 to 28 JAN 2021

EC-3, 31 DEC 2020 to 28 JAN 2021