
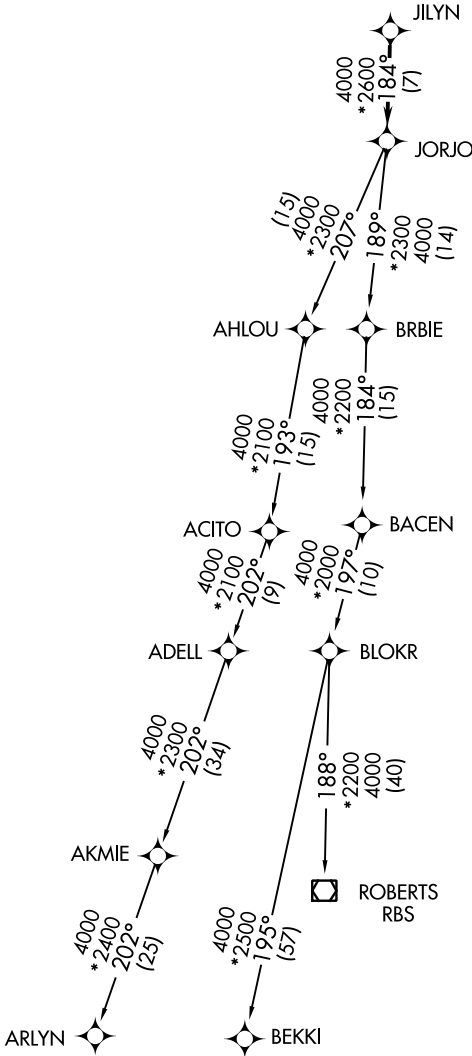


# JORJO FIVE DEPARTURE (RNAV)

ATIS  
132.4  
GND CON  
121.65  
WAUKEGAN TOWER\*  
120.05 273.55  
DEP CON  
120.55

**TOP ALTITUDE:  
3000**



### TAKEOFF MINIMUMS

Rwys 5, 32: Standard with minimum climb of 500' per NM to 1240.  
Rwys 14, 23: Standard with minimum climb of 500' per NM to 1230.

- NOTE: RNAV 1.
- NOTE: RADAR required.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: TURBOJET departures maintain 250K until advised by ATC.
- NOTE: AKMIE transition: for aircraft inbound to BMI, SPI, or PIA, or as assigned by ATC.
- NOTE: ROBERTS transition: for aircraft inbound to CMI or STL, or as assigned by ATC.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

# JORJO FIVE DEPARTURE (RNAV)