

|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Idg  | 5700 |
| 196°    | TDZE     | 55   |
|         | Apt Elev | 56   |



RNAV (RNP) Z RWY 20R  
JOHN WAYNE/ORANGE COUNTY (SNA)

For uncompensated Baro-VNAV systems, procedure NA below 5°C (41°F) or above 54°C (130°F). GPS required.



MISSED APPROACH: Climb to 3000 on track 196° to MINOE.

|                 |                              |                                            |                  |                   |       |                  |
|-----------------|------------------------------|--------------------------------------------|------------------|-------------------|-------|------------------|
| D-ATIS<br>126.0 | SOCAL APP CON<br>121.3 263.1 | JOHN WAYNE TOWER ★<br>126.8 (CTAF) 343.625 | GND CON<br>120.8 | CLNC DEL<br>118.0 | CPDLC | UNICOM<br>122.95 |
|-----------------|------------------------------|--------------------------------------------|------------------|-------------------|-------|------------------|

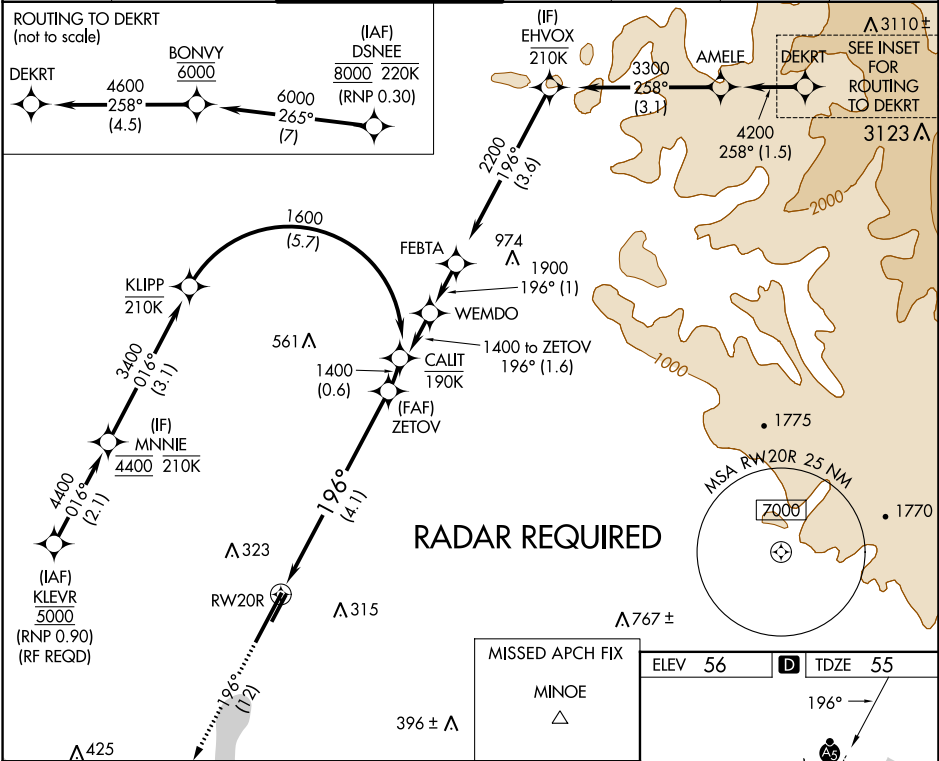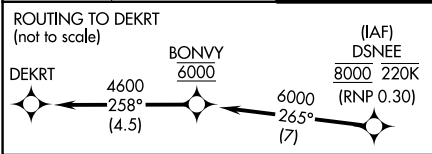

3000

↑

tr 196°

MINOE

△

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).

See planview for multiple IF locations.

ZETOV

1400

RW20R

196°

1400

GP 3.00°

TCH 51

4.1 NM

| CATEGORY    | A | B                   | C                          | D |
|-------------|---|---------------------|----------------------------|---|
| RNP 0.11 DA |   | 377/30              | 322 (400- $\frac{5}{8}$ )  |   |
| RNP 0.15 DA |   | 563-1 $\frac{1}{4}$ | 508 (600-1 $\frac{1}{4}$ ) |   |
| RNP 0.30 DA |   | 619-1 $\frac{1}{2}$ | 564 (600-1 $\frac{1}{2}$ ) |   |

AUTHORIZATION REQUIRED

