



LOC/DME I-TFE	APP CRS	Rwy Idg	12004
111.9	185°	TDZE	94
Chan 56		Apt Elev	96

ILS or LOC RWY 18R

ORLANDO INTL (MCO)

DME or RADAR required. RNP APCH-GPS. From YAGGO.	MALS R	MISSED APPROACH: Climb to 500 then climbing right turn to 4000 on heading 270° and on ORL VORTAC R-227 to CAMBE INT/ ORL 20 DME and hold, continue climb-in-hold to 4000.
Simultaneous approach authorized.		

D-ATIS	ORLANDO APP CON	ORLANDO TOWER	GND CON	CLNC DEL	CPDLC
ARR 121.25	124.8 307.0	118.45 253.5 (Rwys 17L-35R, 17R-35L)	126.4 (East)	134.7	
DEP 120.525		124.3 253.5 (Rwys 18L-36R, 18R-36L)	121.8 (West)	341.7	

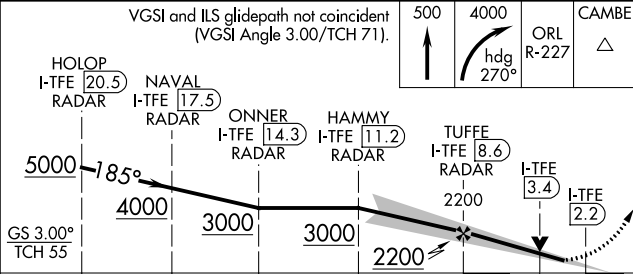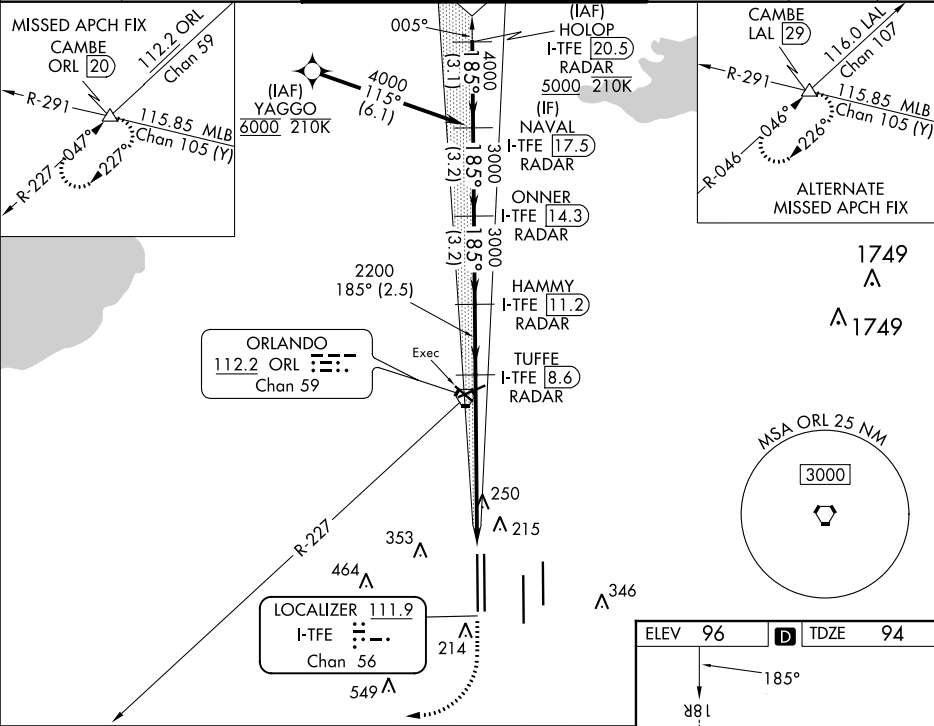

CATEGORY	A	B	C	D
S-ILS 18R	294/18	200 (200-1/2)		
S-LOC 18R	540/24	446 (500-1/2)	540/45	446 (500-7/8)
CIRCLING	740-1	644 (700-1)	740-1 3/4 644 (700-1 3/4)	740-2 644 (700-2)

