


|               |         |          |       |       |
|---------------|---------|----------|-------|-------|
| LOC/DME I-LAS | APP CRS | Rwy Idg  | 26R   | 26L   |
| 110.3         | 259°    | TDZE     | 12638 | 10526 |
| Chan 40       |         | Apt Elev | 2067  | 2069  |
|               |         |          | 2181  | 2181  |

ILS Y or LOC Y RWY 26R  
HARRY REID INTL (LAS)

|                                                                                                          |                                               |                                                                       |               |                                                                                                                                                       |          |
|----------------------------------------------------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| RNP APCH - GPS.                                                                                          |                                               | MALS Rwy 26R                                                          | MALSF Rwy 26L | MISSED APPROACH: Climb to 3200 then climbing right turn to 6000 heading 080° and on BLD R-286 to BLD VORTAC and hold, continue climb-in-hold to 6000. |          |
| Inop table does not apply to Sidestep 26L. For inop ALS, increase S-ILS-26R all Cats visibility to ¾ SM. |                                               | Ⓜ                                                                     | Ⓜ             |                                                                                                                                                       |          |
| D-ATIS                                                                                                   | LAS VEGAS APP CON                             | LAS VEGAS TOWER                                                       |               | GND CON                                                                                                                                               | CLNC DEL |
| 132.4                                                                                                    | 125.025 379.15 (West)<br>119.775 282.2 (East) | 118.75 257.8 (Rwy 1L/19R, 1R/19L)<br>119.9 257.8 (Rwy 8L/26R, 8R/26L) |               | 121.1 270.8 E of 1R/19L<br>121.9 254.3 W of 1R/19L                                                                                                    | 118.0    |
|                                                                                                          |                                               |                                                                       |               |                                                                                                                                                       | CPDLC    |

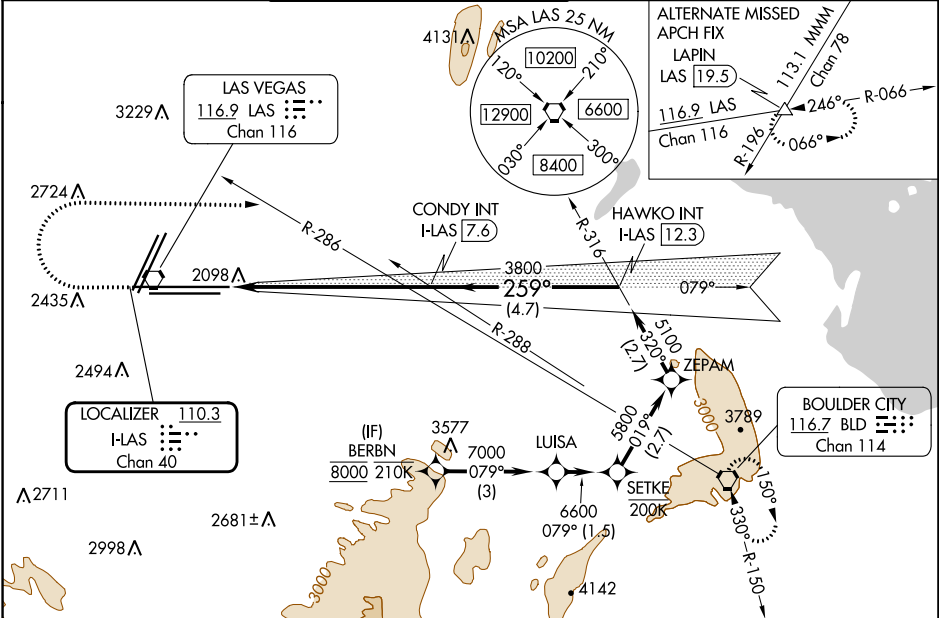

|              |                      |                      |                                                                 |
|--------------|----------------------|----------------------|-----------------------------------------------------------------|
| ELEV 2181    |                      | TDZE 26R 2067        | TDZE 26L 2069                                                   |
| 3200 6000    |                      | BLD R-286            | VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 84). |
| hdg 080°     |                      |                      |                                                                 |
| 1.4 NM       |                      | 4 NM                 | 4.7 NM                                                          |
| HAWKO INT    |                      | CONDY INT            | ZEPAM                                                           |
| I-LAS 2.3    |                      | I-LAS 3.6            | I-LAS 7.6                                                       |
| 3800         |                      | 3800                 | 5100                                                            |
| 259°         |                      | 320°                 | 019°                                                            |
| 5800         |                      | 5800                 | 6600                                                            |
| 079°         |                      | 079°                 | 079°                                                            |
| 8000         |                      | 8000                 | 8000                                                            |
| GS 3.00°     |                      | TCH 60               |                                                                 |
| CATEGORY     | A                    | B                    | C                                                               |
| S-ILS 26R    | 2334-¾ 267 (200-¾)   |                      |                                                                 |
| S-LOC 26R    | 2560-¾ 493 (400-¾)   | 2560-1½ 493 (400-1½) |                                                                 |
| SIDESTEP 26L | 2560-1 491 (400-1)   | 2560-1½ 491 (400-1½) | 2560-2 491 (400-2)                                              |
| CIRCLING     | 3020-1¼ 839 (900-1¼) | 3060-1¼ 879 (900-1¼) | 3100-2¾ 919 (1000-2¾)                                           |
|              |                      |                      | 3540-3 1359 (1400-3)                                            |

