

WAAS CH 48807 W04A	APP CRS 035°	Rwy Idg TDZE 24 Apt Elev 26	7193
--	------------------------	---	-------------

RNAV (GPS) RWY 4

PUNTA GORDA (PGD)


RNP APCH

⚠

When local altimeter setting not received, use Page Fld altimeter setting and increase LPV DA to 274 feet, LNAV/VNAV DA to 443 feet, and all MDA 60 feet; increase LNAV/VNAV all Cats visibility ¼ SM, LNAV Cats C and D visibility ¼ SM, and Circling Cats C and D visibility ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C. Baro-VNAV and VDP NA when using Page Fld altimeter setting.

MISSED APPROACH: Climb to 2000 direct DOGLE and track 087° to JOCKS and hold.

ATIS ★ 135.675	FORT MYERS APP CON ★ 127.05 306.2	PUNTA GORDA TOWER ★ 121.0 (CTAF) 0	GND CON 119.55	CLNC DEL 119.55	CLNC DEL 127.05 (When twr closed)	UNICOM 122.975
--------------------------	---	--	--------------------------	---------------------------	--	--------------------------

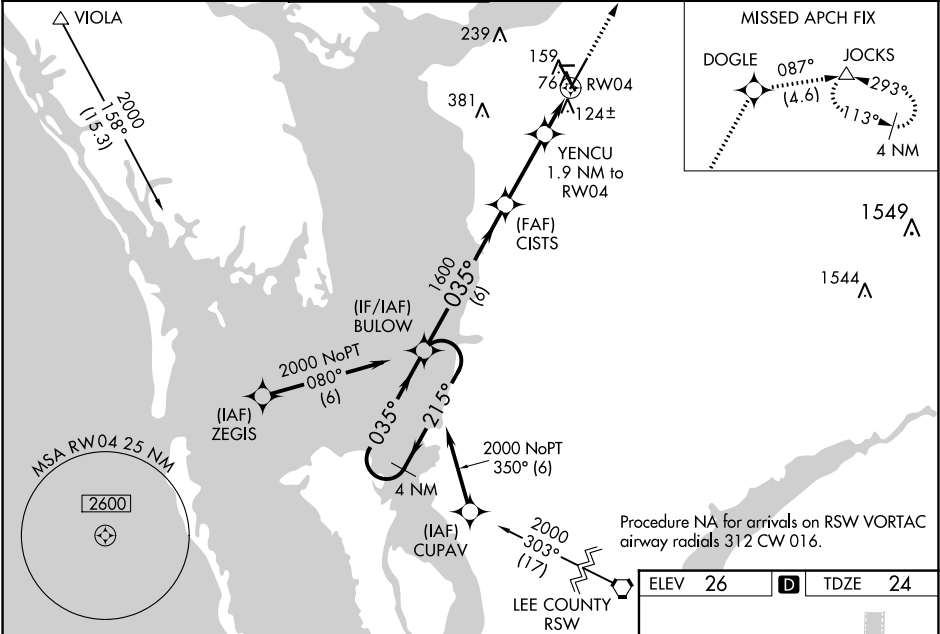

4 NM Holding Pattern		BULOW		2000		215°		035°		035°		1600		680		6 NM		2.9 NM		0.9 NM		1 NM	
GP 3.00° TCH 50		CISTS		1600		*1 NM to RW04		*680		RW04		*1 NM to RW04		*680		*1 NM to RW04		*680		*1 NM to RW04		*680	
CATEGORY		A		B		C		D															
LPV DA				224-¾		200 (200-¾)																	
LNAV/VNAV DA				393-1		369 (400-1)																	
LNAV MDA				400-1		376 (400-1)																	
CIRCLING		460-1 434 (500-1)		580-1 554 (600-1)		600-1½ 574 (600-1½)		740-2¼ 714 (800-2¼)															

