

WAAS CH 99309 W01D	APP CRS 011°	Rwy Idg 9400 TDZE 296 Apt Elev 312
--	------------------------	---

RNAV (GPS) RWY 1L


WASHINGTON DULLES INTL (IAD)

▽ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with ILS or LOC Rwy 1R, ILS Rwy 1R (Cat II), ILS Rwy 1R (Cat III). LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.




MISSED APPROACH: Climb to 4000 direct COCAV and on 300° track to PRISM and on 346° track to MRB VORTAC and hold.

D-ATIS 134.85	POTOMAC APP CON 120.45 306.925 (241°-330°) 128.525 306.925 (091°-240°) 126.1 338.25 (331°-090°)	DULLES TOWER 120.1 317.8 (Rwy 1R/19L) 120.25 348.6 (Rwy 1C/19C) 134.425 348.6 (Rwys 1L/19R and 12/30)	GND CON 121.9 317.8 (EAST) 121.625 348.6 (WEST)
-------------------------	---	---	---

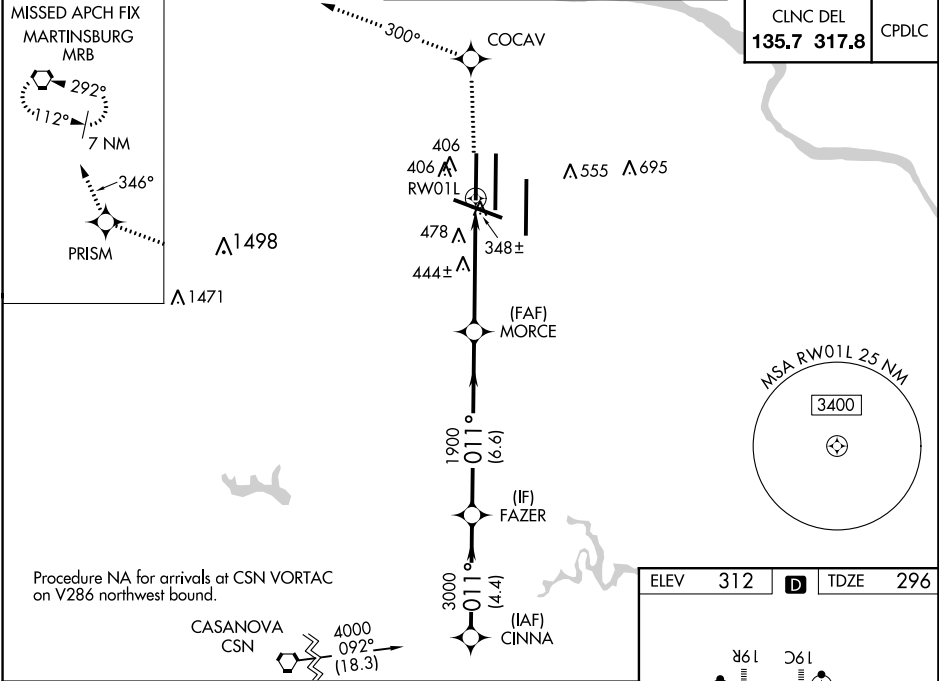

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).	4000	COCAV	tr 300°	PRISM	tr 346	MRB
Procedure NA	FAZER	MORCE	RW01L	RW01L		
Turn NA	3000	011°	1900	*1.2 NM to RW01L	*LNAV only.	
GP 3.00°		1900				
TCH 55						
	6.6 NM	3.6 NM	1.2 NM			
CATEGORY	A	B	C	D		
LPV DA		496/18	200 (200-½)			
LNAV/VNAV DA		828/60	532 (600-1¼)			
LNAV MDA	740/24	444 (500-½)	740/40 444 (500-1)	740/50 444 (500-1)		
CIRCLING	940-1	628 (700-1)	940-1¾ 628 (700-1¾)	940-2 628 (700-2)		

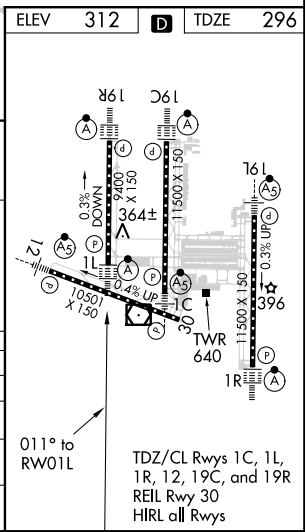

NE-3, 26 MAR 2020 to 23 APR 2020

NE-3, 26 MAR 2020 to 23 APR 2020